
McNealy Brown LIMITED

Bank Station

Dragados | £1,500,000.00 | February 2023

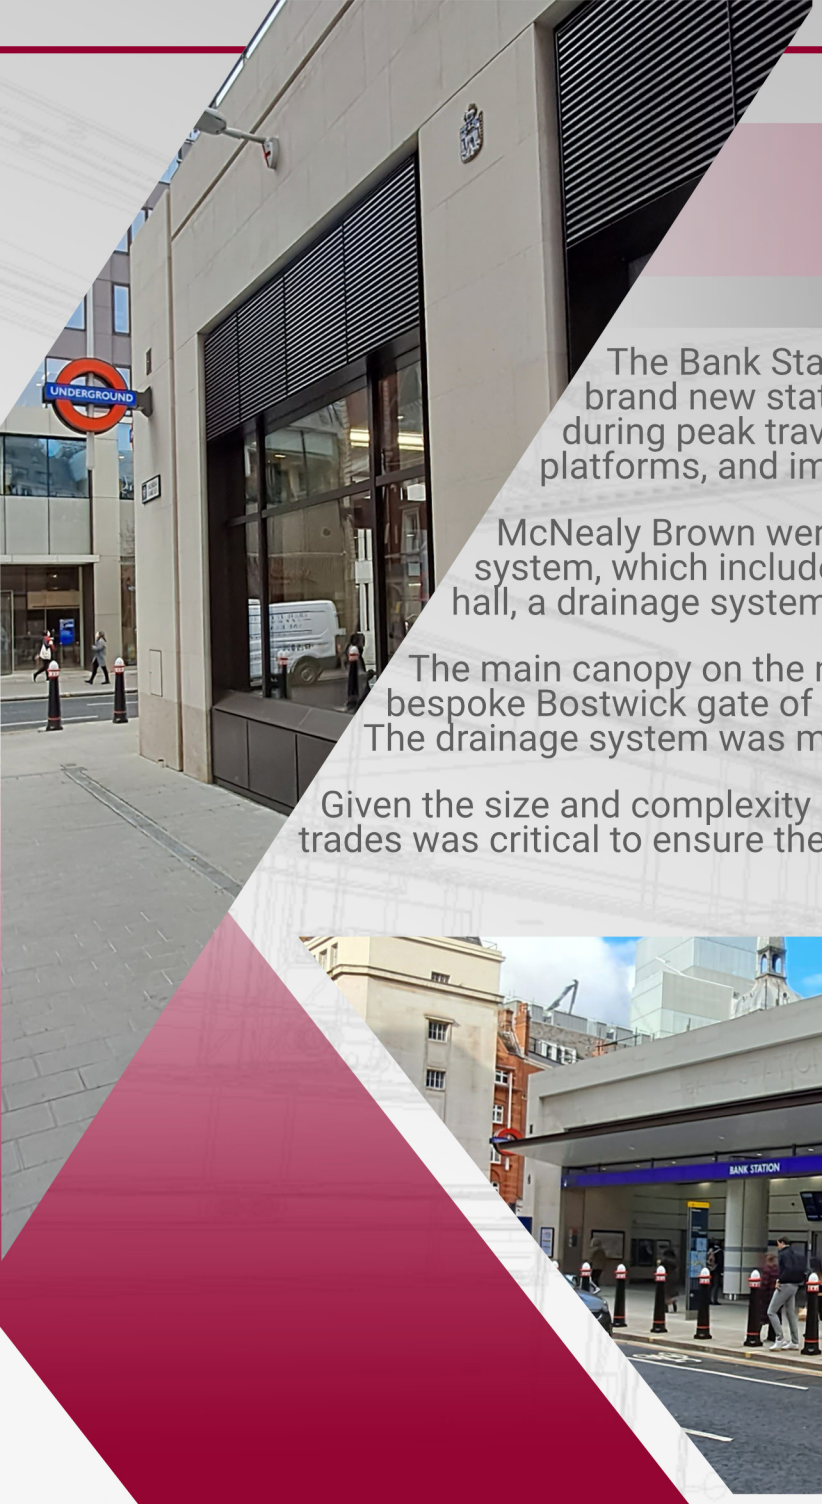

The Bank Station capacity upgrade works were completed on the 27th February 2023, where a brand new station entrance opened. These works were a necessity to reduce over crowding during peak travelling hours, improve interchange times, provide step-free access to DLR platforms, and improve connectivity between stations.

McNealy Brown were contracted to design, fabricate and install a highly bespoke architectural facade system, which included an anodised aluminium finish and hidden fixings, a main canopy over the ticket hall, a drainage system, and a Bostwick Gate.

The main canopy on the new station entrance on Cannon Street, spans approx 21.5m, and beneath it sits a bespoke Bostwick gate of a similar size, making it one of the largest on the London Underground Network. The drainage system was made up of stainless-steel with Aco drain covers.

Given the size and complexity of this project, design coordination between ourselves, the architects and other trades was critical to ensure there were no clashes on site.

Entrance Canopy


Drainage


Louvre Panels

01795 470592 | enquiries@mcnealybrown.co.uk | www.mcnealybrown.co.uk